




Driveshaft Safety Loop Installation Instructions

REQUIRED TOOLS:

- Standard wrenches and sockets
- Hydraulic jack and Jack stands
- Drill

INSTALLATION:

1. Lift vehicle and safely support with stands under the frame rails.
2. Disconnect and remove the exhaust where it goes under the driveshaft.
3. From inside the car, remove the front seats and pull the carpet back so the floorpan is exposed.
4. Use the bracket to mark out the locations in the floor and drill out the holes
5. Place the supplied nutplates on the top of the floor
6. Position the driveshaft safety loop under the car and use the supplied hardware to bolt it to the nutplates. Thread all of the bolts loosely before final torquing the bolts.
7. The carpet and front seats can now be reinstalled
8. Slide the safety loop around the driveshaft and place it on top of the bracket.
9. Reinstall the exhaust and lower the vehicle.

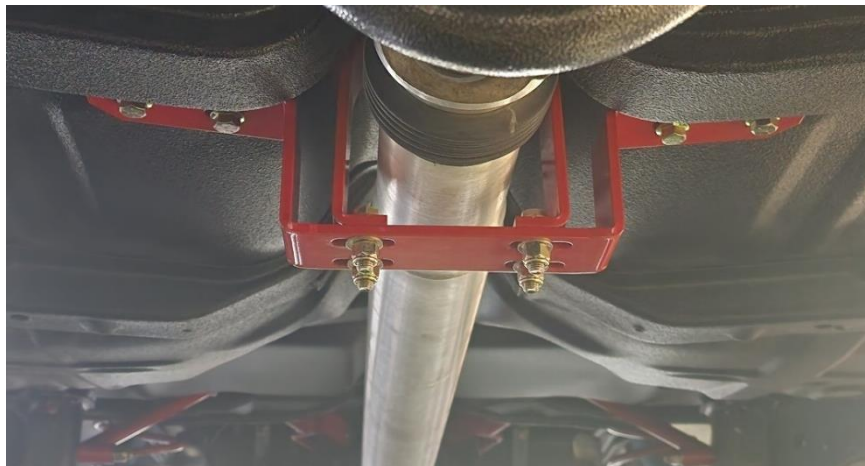

WWW.BMRSUSPENSION.COM

This product is an aftermarket accessory and not designed by the vehicles manufacturer for use on this vehicle. As such, Buyer assumes all risk of any damage caused to the vehicle or person during installation or use of this product.