



**HD SWAYBARS – 2005+ MUSTANG**  
*Part # SB022 and SB023*

*Thank you for purchasing BMR products. Please take a moment to verify contents of this package before proceeding with the installation. It is the sole responsibility of the Purchaser to inventory these contents before vehicle disassembly. BMR will not be held responsible for additional labor time, service lift charges, etc. that may occur due to missing items.*

**Parts List:**


**SB022 Front swaybar**

**SB023 Rear swaybar**

**Hardware – see Image to right**

**Rear Installation:**

1. Lift the rear of the car by its axle and support. It is easiest to remove and install the swaybar with stands under the axle and wheels removed.
2. Remove the four outer swaybar bolts (two on each side) using a 15mm socket. Remove the bushing saddles.
3. Using the same socket, remove the two (one on each side) swaybar link bolts located on the frame and then remove the swaybar.
4. Install the bushing end of the BMR supplied endlinks into the frame mounts and install the factory bolts.
5. Install the 7/8" saddle bushings over the swaybar at the endlink position. Insert the supplied 3/8" bolts, nuts, and washers onto the hanging endlinks to support the swaybar. Leave these bolts finger tight.
6. Install the remaining 7/8" bushings on the ends of the swaybar and then pivot the bar up into position on the rearend. Insert OE bolts and tighten.
7. Tighten all endlink bolts. Grease bushings. Re-install wheels and tires and lower vehicle.

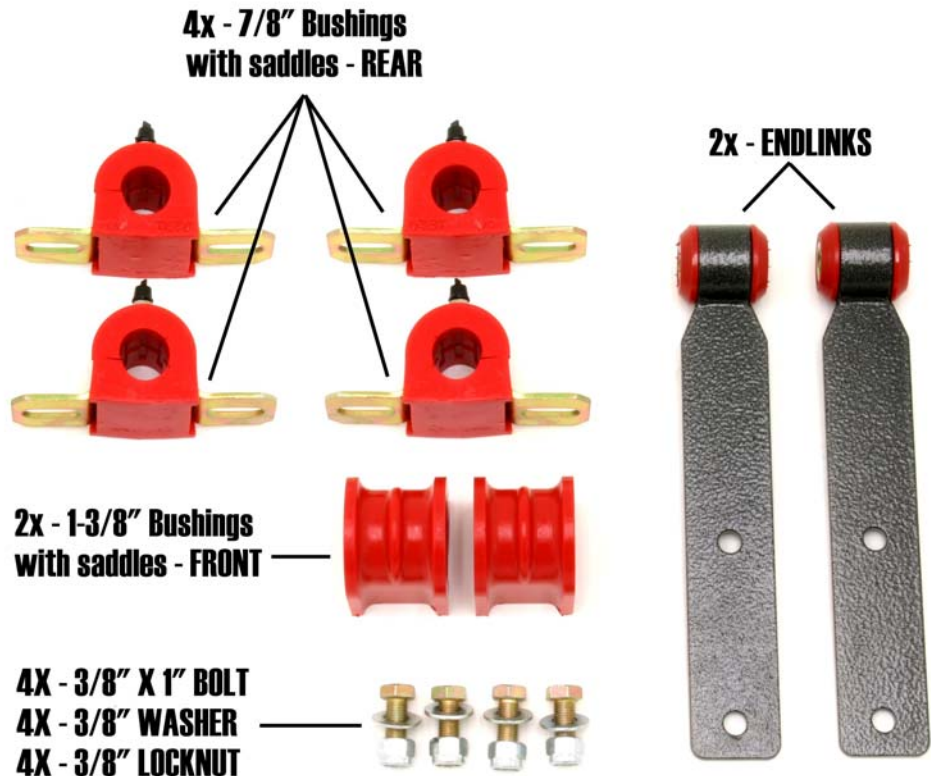

**Front Installation:**

1. Lift nose of vehicle and support with stands.
2. Remove the outer swaybar endlink bolts using a 18mm socket. Leave endlinks attached to struts.
3. Using a 15mm socket, remove all 4 bushing saddle bolts (two per side) and then remove the swaybar.
4. Lube the inside of the 1-3/8" bushings and install them onto the new swaybar.
5. Position the factory saddles over the new bushings and mount the swaybar in place using the OE hardware. Tighten.
6. Pivot the swaybar up into position and insert the endlinks into the swaybar. Tighten.
7. Lower vehicle.

**WWW.BMRFABRICATION.COM**

*This product is an aftermarket accessory and not designed by the vehicles manufacturer for use on this vehicle. As such, buyer assumes all risk of any damage caused to the vehicle/person during installation or use of this product.*